


# General Description

THK General Catalog




## A Technical Descriptions of the Products

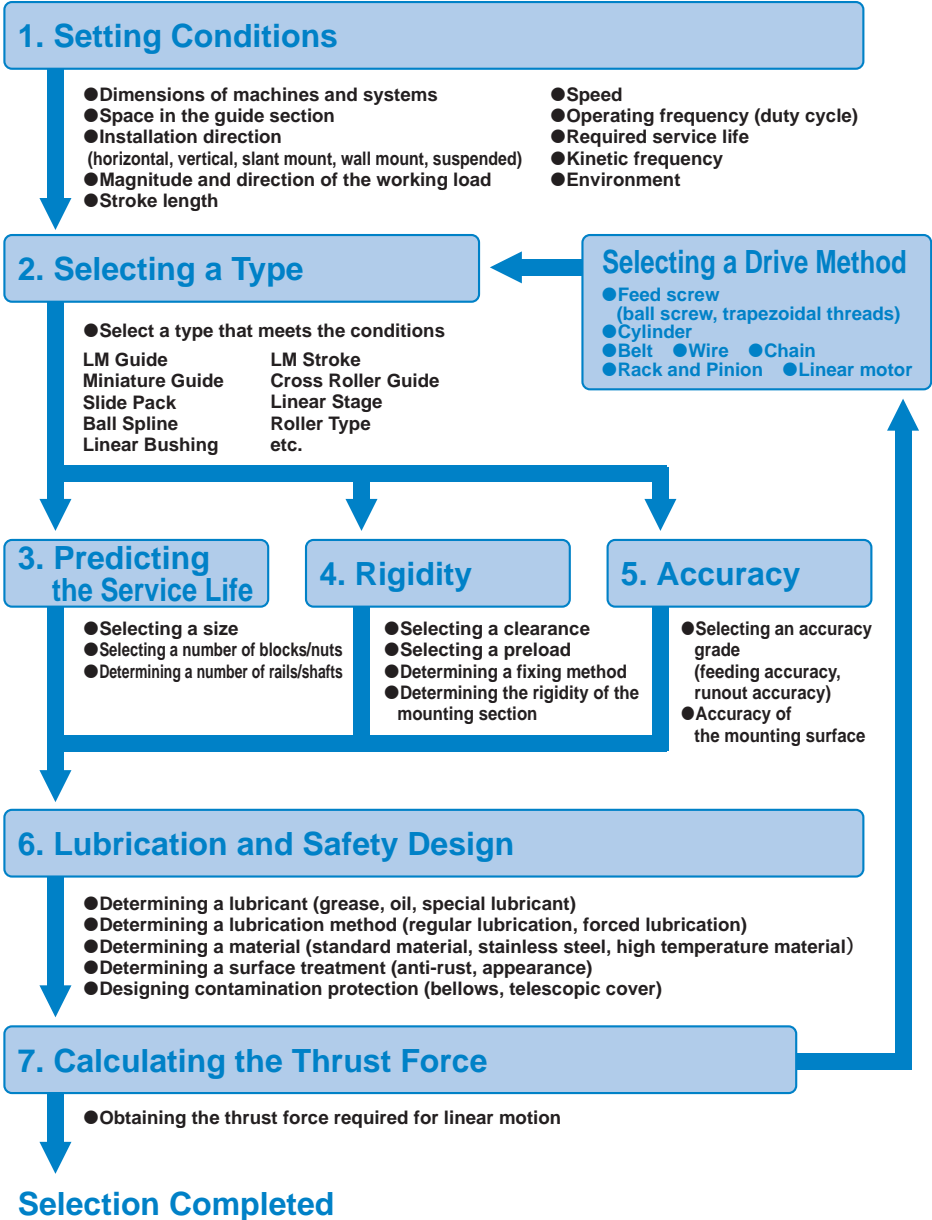


<b>Point of Selection</b> .....	A-2
Selection Flow Chart .....	A-2
Types and Features of LM Systems .	A-3
Load Rating .....	A-7
• Service Life of an LM System .....	A-7
• Nominal Life .....	A-7
• Basic Load Rating .....	A-7
Basic Dynamic Load Rating $C_0$ .....	A-7
Basic Static Load Rating $C_0$ .....	A-8
Static Permissible Moment $M_0$ .....	A-8
Static Safety Factor $f_s$ .....	A-9
Life Calculation Formula .....	A-10
Rigidity .....	A-13
• Selecting a Clearance/Preload for an LM System	A-13
Clearance and Preload .....	A-13
Preload and Rigidity .....	A-14
Friction coefficient .....	A-15
Accuracy .....	A-16
Lubrication .....	A-16
Safety Design .....	A-18
• Determining a Material .....	A-19
Stainless steel LM Systems .....	A-19
• Surface Treatment .....	A-20
AP-HC .....	A-20
AP-C .....	A-20
AP-CF .....	A-20
• Contamination Protection .....	A-23




# Selection Flow Chart






# Types and Features of LM Systems

Type	LM Guide	Ball Spline	Linear Bushing
Appearance			
Features	<ul style="list-style-type: none"> <li>• Ideal Four Raceway, Circular-Arc Groove, Two-Point Contact Structure</li> <li>• Superb error-absorbing capability with the DF design</li> <li>• Accuracy Averaging Effect by Absorbing Mounting Surface Error</li> <li>• Large Permissible Load and High Rigidity</li> <li>• Low Friction Coefficient</li> </ul>	<ul style="list-style-type: none"> <li>• Large torque load capacity</li> <li>• Optimal for torque-transmitting mechanisms and locations where torque and radial load are simultaneously applied</li> <li>• No angular backlash</li> <li>• Ball Retaining Type</li> </ul>	<ul style="list-style-type: none"> <li>• Interchangeable type</li> <li>• LM system capable of performing infinite linear motion at low price</li> </ul>
Stroke	Infinite stroke	Infinite stroke	Infinite stroke
Major Applications	<ul style="list-style-type: none"> <li>• Surface grinder</li> <li>• Electric discharge machine</li> <li>• High-speed transfer equipment</li> <li>• NC lathe</li> <li>• Injection molding machine</li> <li>• Woodworking machine</li> <li>• Semiconductor manufacturing equipment</li> <li>• Inspection equipment</li> <li>• Food-related machine</li> <li>• Medical equipment</li> </ul>	<ul style="list-style-type: none"> <li>• Z axis of assembly robot</li> <li>• Automatic loader</li> <li>• Transfer machine</li> <li>• Automatic conveyance system</li> <li>• Wire winder</li> <li>• Spindle drive shaft of grinding machine</li> <li>• Steering of construction vehicle</li> <li>• Blood test equipment</li> <li>• ATC</li> <li>• Golf training machine</li> </ul>	<ul style="list-style-type: none"> <li>• Measuring instruments</li> <li>• Digital 3D measuring instrument</li> <li>• Printing machine</li> <li>• OA equipment</li> <li>• Automatic vending machine</li> <li>• Medical equipment</li> <li>• Food packaging machine</li> </ul>
Page introducing the product	A-25 onward	A-447 onward	A-523 onward

Type	LM Stroke	Precision Linear Pack	Cross Roller Guide
Appearance			
Features	<ul style="list-style-type: none"> <li>• Capable of performing rotary motion, straight motion and complex motion</li> <li>• Capable of performing rolling motion with an extremely small friction coefficient</li> <li>• Low cost</li> </ul>	<ul style="list-style-type: none"> <li>• Ultra-thin lightweight type</li> <li>• Reduced design and assembly costs</li> </ul>	<ul style="list-style-type: none"> <li>• Long service life, high rigidity</li> <li>• Easy clearance adjustment type</li> </ul>
Stroke	Finite stroke	Infinite stroke	Finite stroke
Major Applications	<ul style="list-style-type: none"> <li>• Press die setting</li> <li>• Ink roll unit of printing machine</li> <li>• Optical measuring instrument</li> <li>• Spindle</li> <li>• Solenoid valve guide</li> <li>• Press post guide</li> <li>• Load cell</li> <li>• Photocopiers</li> <li>• Inspection machines</li> </ul>	<ul style="list-style-type: none"> <li>• Magnetic disc device</li> <li>• Electronic equipment</li> <li>• Semiconductor manufacturing equipment</li> <li>• Medical equipment</li> <li>• Measuring equipment</li> <li>• Plotting machine</li> <li>• Photocopier</li> </ul>	<ul style="list-style-type: none"> <li>• Measuring instruments</li> <li>• Insertion machine</li> <li>• Printed circuit board drilling machine</li> <li>• Inspection equipment</li> <li>• Small stage</li> <li>• Handling mechanism</li> <li>• Automatic lathe</li> <li>• Tool grinder</li> <li>• Internal grinding machine</li> <li>• Small surface grinding machine</li> </ul>
Page introducing the product	A-553 onward	A-565 onward	A-571 onward

Type	Cross Roller Table	Linear Ball Slide	LM Roller
Appearance			
Features	<ul style="list-style-type: none"> <li>• Easily installable unit type</li> <li>• Allows selection of diverse uses</li> </ul>	<ul style="list-style-type: none"> <li>• Easily installable unit type</li> <li>• Lightweight and Compact</li> <li>• Capable of performing rolling motion with an extremely small friction coefficient</li> <li>• Capable of operating without lubrication</li> <li>• Low cost</li> </ul>	<ul style="list-style-type: none"> <li>• Compact, large load capacity type</li> <li>• Self skewing-adjusting type</li> </ul>
Stroke	Finite stroke	Finite stroke	Infinite stroke
Major Applications	<ul style="list-style-type: none"> <li>• Measuring equipment stage</li> <li>• Optical stage</li> <li>• Tool grinder</li> <li>• Printed circuit board drilling machine</li> <li>• Medical equipment</li> <li>• Automatic lathe</li> <li>• Tool grinder</li> <li>• Internal grinding machine</li> <li>• Small surface grinding machine</li> </ul>	<ul style="list-style-type: none"> <li>• Small electronic part assembly machine</li> <li>• Handler</li> <li>• Automatic recorder</li> <li>• Measuring equipment stage</li> <li>• Optical stage</li> <li>• Medical equipment</li> </ul>	<ul style="list-style-type: none"> <li>• Precision press ram guide</li> <li>• Press metal mold exchanger</li> <li>• Heavy load conveyor systems</li> <li>• Vendor machine</li> </ul>
Page introducing the product	A-585 onward	A-593 onward	A-603 onward

Type	Flat Roller	Slide Pack	Slide Rail
Appearance			
Features	<ul style="list-style-type: none"> <li>• Large Load Capacity</li> <li>• Combined accuracy of 90° V-shape surface and flat surface available as standard</li> </ul>	<ul style="list-style-type: none"> <li>• Interchangeable type</li> <li>• Low-cost, simple type</li> </ul>	<ul style="list-style-type: none"> <li>• Thin, compact design</li> <li>• Low-cost, simple type</li> <li>• High strength, high durability</li> </ul>
Stroke	Finite stroke	Infinite stroke	Finite stroke
Major Applications	<ul style="list-style-type: none"> <li>• Planer</li> <li>• Horizontal milling machine</li> <li>• Roll grinding machine</li> <li>• Surface grinder</li> <li>• Cylindrical grinder</li> <li>• Optical measuring instrument</li> </ul>	<ul style="list-style-type: none"> <li>• Amusement machine</li> <li>• High-grade furniture</li> <li>• Light and heavy doors</li> <li>• Tool cabinet</li> <li>• Kitchen fitments</li> <li>• Automatic feeder</li> <li>• Computer peripherals</li> <li>• Photocopier</li> <li>• Medical equipment</li> <li>• Office equipment</li> </ul>	<ul style="list-style-type: none"> <li>• Amusement machine</li> <li>• High-grade furniture</li> <li>• Light and heavy doors</li> <li>• Office equipment</li> <li>• Store fixture</li> <li>• Stocker</li> </ul>
Page introducing the product	A-621 onward	A-635 onward	A-645 onward

# Load Rating

## Service Life of an LM System

When an LM system rolls under a load, its raceway and rolling elements (balls or rollers) constantly receive repetitive stress. If a limit is reached, the raceway fractures from fatigue and part of the surface exfoliates like scales. This phenomenon is called flaking.

The service life of an LM system refers to the total travel distance until the first event of flaking occurs due to rolling fatigue of the material on the raceway or the rolling element.

## Nominal Life

The service life of an LM system is subject to slight variations even under the same operating conditions. Therefore, it is necessary to use the nominal life defined below as a reference value for obtaining the service life of the LM system.

The nominal life means the total travel distance that 90% of a group of identical LM system units can achieve without flaking.

## Basic Load Rating

An LM system has two types of basic load ratings: basic dynamic load rating (C), which is used to calculate the service life, and basic static load rating ( $C_0$ ), which defines the static permissible limit.

### Basic Dynamic Load Rating C

The basic dynamic load rating (C) indicates the load with constant direction and magnitude, under which the rated life (L) is  $L = 50$  km for an LM system using balls, or  $L = 100$  km for an LM system using rollers, when a group of identical LM system units independently operate under the same conditions.

The basic dynamic load rating (C) is used to calculate the service life when an LM system operates under a load.

Specific values of each LM system model are indicated in the specification table for the corresponding model number.

## Basic Static Load Rating $C_0$

If an LM system receives an excessively large load or a large impact when it is stationary or operative, permanent deformation occurs between the raceway and the rolling element. If the permanent deformation exceeds a certain limit, it will prevent the LM system from performing smooth motion.

The basic static load rating is a static load with a constant direction and magnitude whereby the sum of the permanent deformation of the rolling element and that of the raceway on the contact area under the maximum stress is 0.0001 times the rolling element diameter. With an LM system, the basic static load rating is defined for the radial load.

Therefore, the basic static load rating is considered the limit of the static permissible load.

Specific values of each LM system model are indicated in the specification table for the corresponding model number.


## Static Permissible Moment $M_0$

When an LM system receives a moment, the rolling elements on both ends receive the maximum stress due to uneven distribution of the stress on the rolling elements within the LM system.

The permissible static moment ( $M_0$ ) means the moment with constant direction and magnitude, under which the sum of the permanent deformation of the rolling element and the permanent deformation of the raceway accounts for 0.0001 times of the rolling element's diameter in the contact area where the maximum stress is applied.

With an LM system, the static permissible moment is defined in three directions:  $M_A$ ,  $M_B$  and  $M_C$ .

Thus, the static permissible moment is considered the limit of the static moment applied.

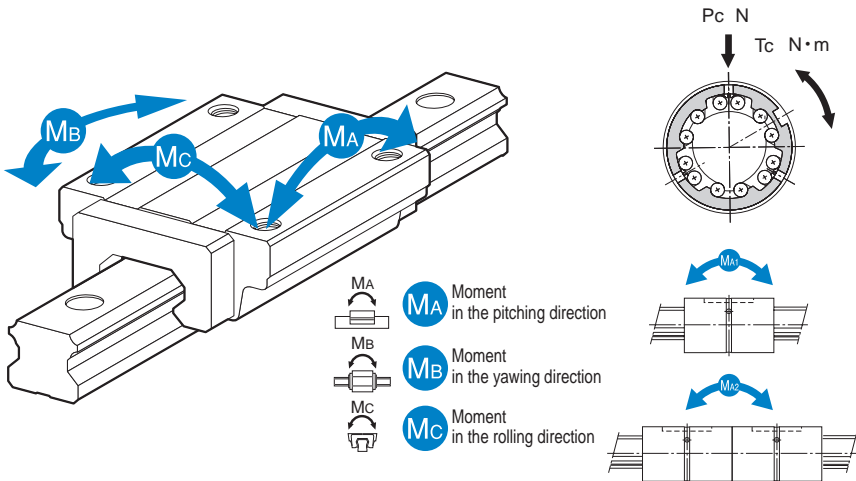

$P_c$  : Radial load

$T_c$  : Moment in the torque direction

$M_{A1}$  : Moment in the pitching direction

$M_{A2}$  : Moment in the pitching direction

The specific static permissible moment value of each LM system model is provided in the section on the permissible moments of each model.



## Static Safety Factor $f_s$

The Linear Motion system may receive an unexpected external force while it is stationary or operative due to the generation of an inertia caused by vibrations and impact or start and stop. It is necessary to consider a static safety factor against such a working load.

### [Static Safety Factor $f_s$ ]

The static safety factor ( $f_s$ ) is determined by the ratio of the load capacity (basic static load rating  $C_0$ ) of an LM system to the load applied on the LM system.

$$f_s = \frac{f_c \cdot C_0}{P} \quad \text{or} \quad f_s = \frac{f_c \cdot M_0}{M} \quad \dots\dots\dots (1)$$

- $f_s$  : Static safety factor
- $f_c$  : Contact factor (see Table2 on A-11)
- $C_0$  : Basic static load rating
- $M_0$  : Static permissible moment ( $M_A$ ,  $M_B$  and  $M_C$ )
- $P$  : Calculated load
- $M$  : Calculated moment

### [Measure of Static Safety Factor]

Refer to the static safety factor in Table1 as a measure of the lower limit under the service conditions.

Table1 Measure of Static Safety Factor

Kinetic conditions	Load conditions	Lower limit of $f_s$
Constantly stationary	Impact is small, and deflection of the shaft is also small	1.0 to 1.3
	Impact is present, and a twisting load is applied	2.0 to 3.0
Normal motion	A normal load is applied, and the deflection of the shaft is small	1.0 to 1.5
	Impact is present, and a twisting load is applied	2.5 to 7.0

# Life Calculation Formula

The nominal life (L) of an LM system is obtained from the following equation using the basic dynamic load rating (C) and the applied load (P).

## [LM System Using Balls]

$$L = \left(\frac{C}{P}\right)^3 \times 50 \quad \dots\dots\dots (2)$$

## [LM System Using Rollers]

$$L = \left(\frac{C}{P}\right)^{\frac{10}{3}} \times 100 \quad \dots\dots\dots (3)$$

- L : Nominal life (km)
- C : Basic dynamic load rating (N)
- P : Applied load (N)

In most cases, it is difficult to calculate a load applied on an LM system. In actual use, most LM systems receive vibrations and impact during operation, and fluctuation of the loads applied on them is assumed. In addition, the hardness of the raceway and the temperature of the LM system unit greatly affect the service life. With these conditions considered, the practical service life calculation formulas (2) and (3) should be as follows.

## [LM System Using Balls]

$$L = \left(\frac{f_H \cdot f_T \cdot f_C}{f_W} \times \frac{C}{P}\right)^3 \times 50 \quad \dots\dots\dots (4)$$

## [LM System Using Rollers]

$$L = \left(\frac{f_H \cdot f_T \cdot f_C}{f_W} \times \frac{C}{P}\right)^{\frac{10}{3}} \times 100 \quad \dots\dots\dots (5)$$

- L : Nominal life (km)
- C : Basic dynamic load rating (N)
- P : Applied load (N)
- f<sub>H</sub> : Hardness factor (see Fig.1 on A-11)
- f<sub>T</sub> : Temperature factor  
(see Fig.2 on A-11)
- f<sub>C</sub> : Contact factor (see Table2 on A-11)
- f<sub>W</sub> : Load factor (see Table3 on A-12)

●  **$f_H$ : Hardness Factor**

To maximize the load capacity of the LM system, the hardness of the raceways needs to be between 58 and 64 HRC.

If the hardness is lower than this range, the basic dynamic load rating and the basic static load rating decrease. Therefore, it is necessary to multiply each rating by the respective hardness factor ( $f_H$ ).

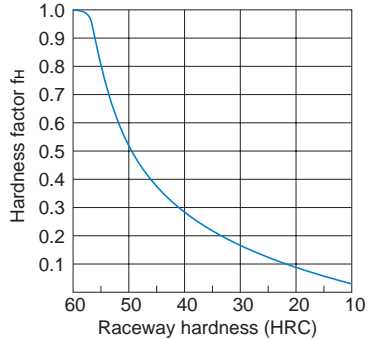


Fig.1 Hardness Factor ( $f_H$ )

●  **$f_T$ : Temperature Factor**

If the temperature of the environment surrounding the operating LM System exceeds 100 °C, take into account the adverse effect of the high temperature and multiply the basic load ratings by the temperature factor indicated in Fig.2.

In addition, the LM system must be of high temperature type.

Note) If the temperature of the service environment exceeds 80 °C, it is necessary to change the materials of the seal and end plate to high-temperature materials.

Note) If the temperature of the environment exceeds 120°C, it is necessary to provide dimensional stabilization.

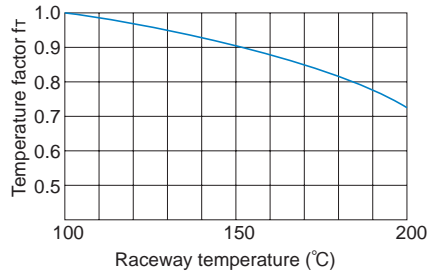


Fig.2 Temperature Factor ( $f_T$ )

●  **$f_c$ : Contact Factor**

If multiple LM Guide blocks are closely arranged with each other, it is difficult to achieve uniform load distribution due to a moment load and the accuracy of the mounting surface. In such applications, multiply basic load ratings “C” and “C<sub>0</sub>” by the corresponding contact factors in Table2.

Note) If uneven load distribution is expected in a large machine, take into account the respective contact factor indicated in Table2.

Table2 Contact Factor ( $f_c$ )

Number of blocks used in close contact	Contact factor $f_c$
2	0.81
3	0.72
4	0.66
5	0.61
6 or greater	0.6
Normal use	1

● **f<sub>w</sub>: Load Factor**

In general, reciprocating machines tend to involve vibrations or impact during operation. It is extremely difficult to accurately determine vibrations generated during high-speed operation and impact during frequent start and stop. Therefore, where the effects of speed and vibration are estimated to be significant, divide the basic dynamic load rating (C) by a load factor selected from Table3, which contains empirically obtained data.

Table3 Load Factor (f<sub>w</sub>)

Vibrations/ impact	Speed(V)	f <sub>w</sub>
Faint	Very low $V \leq 0.25\text{m/s}$	1 to 1.2
Weak	Slow $0.25 < V \leq 1\text{m/s}$	1.2 to 1.5
Medium	Medium $1 < V \leq 2\text{m/s}$	1.5 to 2
Strong	High $V > 2\text{m/s}$	2 to 3.5

# Rigidity

When using an LM system, it is necessary to select a type and a clearance (preload) that meet the service conditions in order to achieve the required rigidity of the machine/equipment.

## Selecting a Clearance/Preload for an LM System

Since clearances and preloads of LM systems are standardized for different models, you can select a clearance and a preload according to the service conditions.

For separate-type models, THK cannot adjust their clearances at shipment. Therefore, the user must adjust the clearance when installing the product.

Determine a clearance/preload while referring to the following section.

### Clearance and Preload

#### [Clearance (internal clearance)]

Clearance of an LM system is a play between the block (nut), the rail (shaft) and the ball (or roller). The sum of vertical clearances is called radial clearance, and the sum of circumferential clearances is called angular backlash (clearance in the rotational direction).

#### (1) Radial clearance

With the LM Guide, a radial clearance refers to the value of a movement of the block center when the LM block is gently moved vertically with constant force applied in the center of the fixed LM rail in the longitudinal direction.

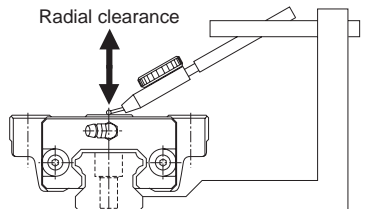


Fig.3 Radial clearance of the LM Guide

#### (2) Angular backlash (clearance in the rotational direction)

With the Ball Spline, angular backlash (clearance in the rotational direction) refers to the value of a rotational motion of the nut when the nut is gently rotated forward and backward with constant force with the spline shaft fixed.




Fig.4 Angular backlash of the Ball Spline

**[Preload]**

Preload is a load that is preliminarily applied to the rolling elements in order to eliminate a clearance of an LM system and increase its rigidity. A negative clearance indication (negative value) of an LM system means that a preload is provided.

Table4 Examples of Radial Clearances for LM Guide Model HSR  
Unit:  $\mu\text{m}$

Indication symbol	Normal	Light preload	Medium preload
Model No.	No Symbol	C1	C0
HSR 15	-4 to +2	-12 to -4	—
HSR 20	-5 to +2	-14 to -5	-23 to -14
HSR 25	-6 to +3	-16 to -6	-26 to -16
HSR 30	-7 to +4	-19 to -7	-31 to -19
HSR 35	-8 to +4	-22 to -8	-35 to -22

For specific clearances and preloads, see the section concerning the corresponding model.

**Preload and Rigidity**

Providing a preload to an LM system will increase the rigidity according to the amount of the preload. Fig.5 shows deflection of clearances (normal clearance, clearance C1 and clearance C0) (with LM Guide model HSR).

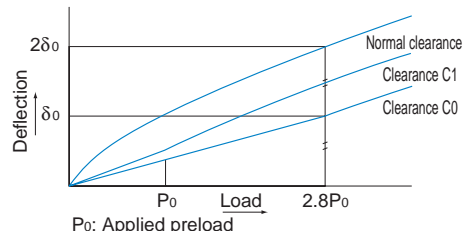


Fig.5 Rigidity Data

Thus, a preload has an effect of up to approximately 2.8 times greater than the applied preload itself. The deflection with a preload under a given load is smaller, and the rigidity is much greater, than that without a preload.

Fig.6 shows how the radial deflection of an LM Guide changes with a preload. As indicated in Fig.6, when an LM Guide block receives a radial load of 2.45 kN, the radial deflection is  $9\mu\text{m}$  if the radial clearance is zero (normal clearance) or  $2\mu\text{m}$  if the radial clearance is  $-30\mu\text{m}$  (clearance C0), thus increasing the rigidity by 4.5 times.

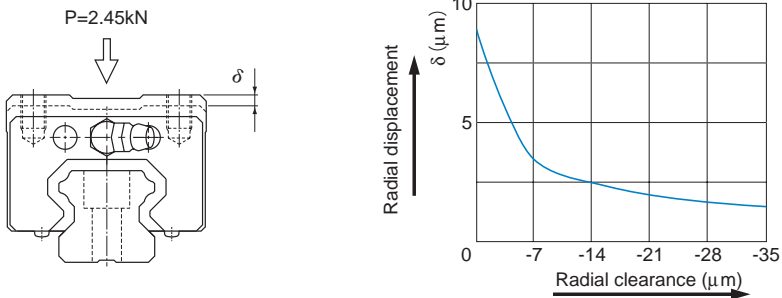


Fig.6 Radial Clearance and Deflection

For selecting a specific clearance, see the section concerning selection of a radial clearance for the corresponding LM system model.

## Friction coefficient

Since an LM system makes rolling motion via its rolling elements such as balls and rollers between the raceways, its frictional resistance is 1/20 to 1/40 smaller than a sliding guide. Its static friction is especially small and almost the same as dynamic friction, preventing the system from experiencing "stick-slip." Therefore, the system is capable of being fed by the submicron distance? Not sure what we're trying to say here.

The frictional resistance of an LM system varies according to the type of the LM system, preload, viscosity resistance of the lubricant and the load applied on the LM system.

In particular, when a moment is given or a preload is applied to increase rigidity, the frictional resistance increases.

Normal friction coefficient by LM systems are indicated in Table5.

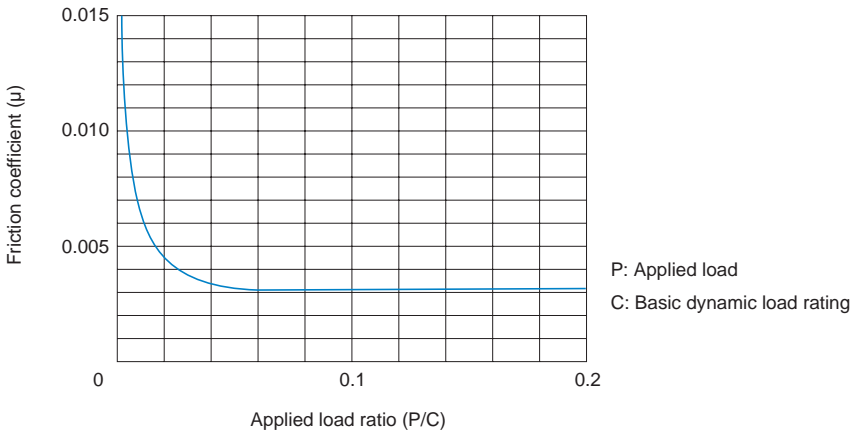


Fig.7 Relationship between Applied Load Ratio and Frictional Resistance

Table5 Frictional Resistances ( $\mu$ ) of LM Systems

Types of LM systems	Representative types	Frictional resistance ( $\mu$ )
LM Guide	SSR, SHS, SNR/SNS, SRS, RSR, HSR, NR/NRS	0.002 to 0.003
	SRG, SRN	0.001 to 0.002
Ball Spline	LBS, LBF, LT, LF	0.002 to 0.003
Linear Bushing	LM, LMK, LMF, SC	0.001 to 0.003
LM Stroke	MST, ST	0.0006 to 0.0012
LM Roller	LR, LRA	0.005 to 0.01
Flat Roller	FT, FTW	0.001 to 0.0025
Cross-roller Guide/Cross-roller Table	VR, VRU, VRT	0.001 to 0.0025
Linear Ball Slide	LS	0.0006 to 0.0012
Cam Follower/Roller Follower	CF, NAST	0.0015 to 0.0025

# Accuracy

The motion accuracy of an LM system is defined in running accuracy for models that are fixed on the flat surface and in runout accuracy for models whose shafts are supported, and accuracy grades are established for each of them.

For details, see the page concerning the corresponding model.

# Lubrication

When using an LM system, it is necessary to provide effective lubrication. Using the product without lubrication may increase wear of the rolling elements or shorten the service life.

A lubricant has the following effects.

1. Minimizes friction in moving elements to prevent seizure and reduce wear.
2. Forms an oil film on the raceway to decrease stress acting on the surface and extend rolling fatigue life.
3. Covers the metal surface to prevent rust formation.

To fully bring out an LM system's functions, it is necessary to provide lubrication according to the conditions.

Even with an LM system with seals, the internal lubricant gradually seeps out during operation. Therefore, the system needs to be lubricated at an appropriate interval according to the conditions.

### [Types of Lubricants]

LM systems mainly use grease or sliding surface oil for their lubricants.

The requirements that lubricants need to satisfy generally consist of the following.

- (1) High oil film strength
- (2) Low friction
- (3) High wear resistance
- (4) High thermal stability
- (5) Non-corrosive
- (6) Highly anti-corrosive
- (7) Minimal dust/water content
- (8) Consistency of grease must not be altered to a significant extent even after it is repeatedly stirred.

Lubricants that meet these requirements include the following products.

Table6 Lubricants for General Use

Lubricant	Type	Brand name
Oil	Sliding surface oil or turbine oil ISOVG32 to 68	Super Multi 32 to 68 (Idemitsu) Vactra No.2S (ExxonMobile) DT Oil (ExxonMobile) Tonner Oil (Showa Shell Sekiyu) or equivalent



Table7 Lubricants Used under Special Environments

Service environment	Lubricant characteristics	Brand name
High-speed moving parts	Grease with low torque and low heat generation	AFG Grease(THK) see A-968 AFA Grease(THK) see A-959 NBU15(NOK Kluba) Multemp (Kyodo Yushi) or equivalent
Vacuum	Fluorine based vacuum grease or oil (vapor pressure varies by brand) <small>Note 1</small>	Fomblin Grease (Solvay Solexis) Fomblin Oil (Solvay Solexis) Barrierta IEL/V (NOK Kluba) Isoflex(NOK Kluba) Krytox (Dupont)
Clean room	Grease with very low dust generation	AFE-CA Grease(THK) see A-963 (The above vacuum grease products also applicable) AFF Grease(THK) see A-965
Environments subject to microvibrations or microstrokes, which may cause fretting corrosion	Grease that easily forms an oil film and has high fretting resistance	AFC Grease(THK) see A-961
Environments subject to a spattering coolant such as machine tools	Highly anti-corrosive, refined mineral oil or synthetic oil that forms a strong oil film and is not easily emulsified or washed away by coolant Water-resistant grease <small>Note 2</small>	Super Multi 68 (Idemitsu) Vactra No.2S (ExxonMobile) or equivalent

Note1) When using a vacuum grease, be sure that some brands have starting resistances several times greater than ordinary lithium-based greases.

Note2) In an environment subject to a spattering water-soluble coolant, some brands of intermediate viscosity significantly decrease their lubricity or do not properly form an oil film. Check the compatibility between the lubricant and the coolant.

Note3) Do not mix greases with different physical properties.

Note4) For THK original grease products, see A-958.

# Safety Design

LM systems are used in various environments. If using an LM system in a special environment such as vacuum, anti corrosion, high temperature and low temperature, it is necessary to select a material and surface treatment that suit the service environment.

To support use in various special environments, THK offers the following materials and surface treatments for LM systems.

	Description	Model No.	Features/Capabilities
Material	Martensite stainless steel		Anti-rust property ★★★★★
	Martensite stainless steel	SR-M1 HSR-M1 RSR-M1 	High temperature support ★★★★★ * up to 150°C
	Austenite stainless steel	HSR-M2 	Anti-rust property ★★★★★
Surface Treatment	AP-HC	THK AP-HC TREATMENT 	Low dust generation ★★★★★ Anti-rust property ★★★ Surface hardness ★★★★★
	AP-C	THK AP-C TREATMENT 	Anti-rust property ★★★★★
	AP-CF	THK AP-CF TREATMENT 	Anti-rust property ★★★★★

\* If you desire a surface treatment other than the above, contact THK.

## Determining a Material


In normal service conditions, LM systems use a type of steel that suits LM systems. If using an LM system in a special environment, it is necessary to select a material that suits the service environment.

For locations that require high corrosion resistance, a stainless steel material is used.

### Material Specifications

# Stainless Steel LM Systems

- Material: martensite stainless steel/austenite stainless steel



For use in environments where corrosion resistance is required, some LM system models can use martensite stainless steel.

If the model number of an LM system contains symbol M, it means that the model is made of stainless steel. See the section concerning the corresponding model.

### Model number coding

<b>HSR25</b>	<b>A</b>	<b>2</b>	<b>QZ</b>	<b>UU</b>	<b>C0</b>	<b>M</b>	<b>+1200L</b>	<b>P</b>	<b>M</b>	<b>- II</b>
Model number		With QZ Lubricator		Radial clearance symbol		LM rail length (in mm)				Symbol for No. of rails used on the same plane
	No. of LM blocks used on the same rail					Stainless steel LM block				Stainless steel LM rail
	Type of LM block			Dust prevention accessory symbol				Accuracy symbol		


## Surface Treatment

The surfaces of the rails and shafts of LM systems can be treated for anti-corrosive or aesthetic purposes.

THK offers THK-AP treatment, which is the optimum surface treatment for LM systems. The THK-AP treatment consists of the following 3 types.

### AP-HC


- Surface treatment... industrial-use hard chrome plating
- Film hardness... 750 Hv or higher



Equivalent to industrial-use hard chrome plating, AP-HC achieves almost the same level of corrosion resistance as martensite stainless steel. In addition, it is highly wear resistant since the film hardness is extremely high, 750 Hv or higher.

### AP-C

- Surface treatment... industrial-use black chrome coating



A type of industrial-use black chrome coating designed to increase corrosion resistance. It achieves lower cost and higher corrosion resistance than martensite stainless steel.

### AP-CF

- Surface treatment... industrial-use black chrome coating / special fluorocarbon resin coating




A compound surface treatment that combines black chrome coating and special fluorine resin coating and is suitable for applications requiring high corrosion resistance.

In addition to the above treatments, other surface treatments are sometimes performed on areas other than the raceways, such as alkaline coloring treatment (black oxidizing) and color anodize treatment. However, some of them are not suitable for LM systems. For details, contact THK.

If using an LM system whose raceways are surface treated, set a higher safety factor.

#### Model number coding

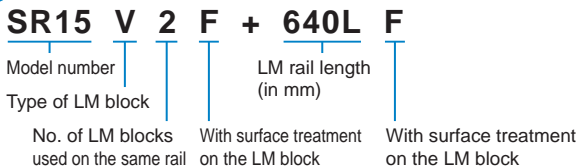


Note) Note that the inside of the mounting hole is not provided with surface treatment.

[Data on Comparison of Dust Generation with AP Treatment]

[Test conditions]

Item	Description
LM Guide model number	SSR20WF+280LF (AP-CF, without seal)
	SSR20UUF+280LF (AP-CF, with seal)
	SSR20WUUF+280LF (AP-HC, with seal)
Grease used	THK AFE-CA Grease
Grease quantity	1cc (per LM block)
Speed	30m/min(MAX)
Stroke	200mm
Flow rate during measurement	1l/min
Clean room volume	1.7 liter (acrylic casing)
Measuring instrument	Dust counter
Measured particle diameter	0.3 $\mu$ m or more

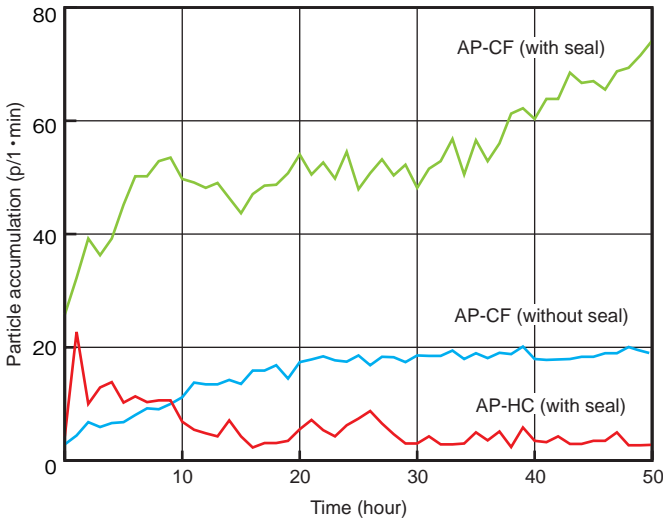

THK AP-HC treatment provides high surface hardness and has high wear resistance. The high level of wear in the early stage in the graph above is considered to be due to the initial wear of the end seal.





















Note) THK AP-HC treatment (equivalent to hard chrome plating)  
THK AP-CF treatment (equivalent to black chrome plating + fluorine resin coating)

## [Data on Comparison of Rust Prevention]

<Salt-water spray resistance cycle test>

Item	Description
Spray liquid	1% NaCl solution
cycles	Spraying for 6 hours, drying for 6 hours
Temperature conditions	35°C during spraying
	60°C during drying

dammy

Specimen material		Austenite stainless steel	Martensite stainless steel	THK AP-HC	THK AP-C	THK AP-CF
Time						
Before test						
6 hours						
24 hours						
96 hours						
Test Result	Anti-rust property	◎	○	○	◎	◎
	Wear Resistance	○	◎	◎	△	○
	Surface hardness	△	◎	◎	△	△
	Adherence	—	—	◎	△	○
	Appearance	Metallic luster	Metallic luster	Metallic luster	Black luster	Black luster

## Contamination Protection

Contamination protection is the most important factor in using an LM system. Entrance of dust or other foreign material into the LM system will cause abnormal wear or shorten the service life. Therefore, when entrance of dust or other foreign material is predicted, it is necessary to select a sealing device or contamination protection device that meets the service environment conditions.

### (1) Dedicated seals for LM systems

For LM systems, seals made of special synthetic rubber with high wear resistance (e.g., Laminated Contact Scraper LaCS) and a wiper ring are available as contamination protection seals.

For locations with adverse service environments, dedicated bellows and dedicated covers are available for some models.


For details and symbols of these seals, see the section concerning options (contamination protection) for the corresponding model.

To provide contamination protection also for Ball Screws in service environments subject to cutting chips and cutting fluids, it is advisable to use a telescopic cover that covers the whole system and a large-size bellows.


### (2) Dedicated bellows

For LM Guides, standardized bellows are available.


THK manufactures dedicated bellows also for other LM systems such as Ball Screws and Ball Splines. Contact THK for details.

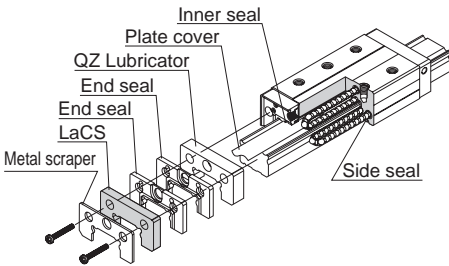


Contamination Protection Seal for the LM Guide



Dedicated Bellows for the LM Guide

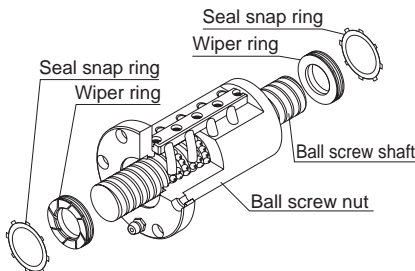

Wiper Ring for the Ball Screw

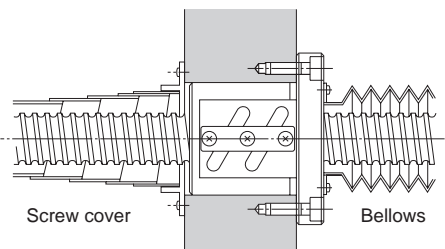

Contamination Protection Cover for the Ball Screw

